



NEO-RAY™



41

DIRECT

- 3' or 4' individual sections.
- Direct light distribution.
- T5 and T8 lamping.
- Die formed steel housing.
- Selection of 3 light diffuser options.
- Rigid 'U' shaped trim is double formed with 3/8" regress soft lit edge.

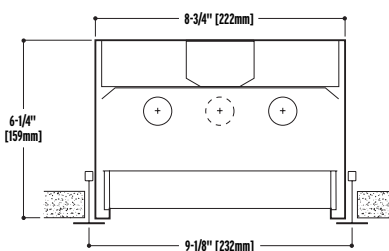

Construction

20-gauge steel housing. Nominal 3' or 4' sections.

Shielding

Acrylic lens. Parabolic or bold baffle shielding.

Electrical

120, 277, 347 or Universal Voltage electronic ballast. Fixtures and electrical components certified to UL and CUL standards.

Finish

Durable, low gloss, white, powder coated acrylic finish.

Mounting

Recessed in Acoustical tile ceiling specify grid type. Refer to series 41 for application in Acoustical Tile ceiling.

ORDERING INFORMATION:

Sample number: 41R-3T8-42-2EB-SI

Series

41 (ETG-Exposed "T" grid ceiling)

Mounting

R=Recessed

Number of Lamps (not included)

1=1 Lamp 2=2 Lamps 3=3 Lamps

Lamp Type (Length)

T8 T5 T5H0

Length

4' and 3' individual sections

Voltage ¹

1=120V 2=277V 3=347V U=Universal

Ballast

EB=Electronic Ballast (Standard) DB=Dimming Ballast

Switching

SI=Single Switching DU=Dual Switching

Emergency

EM=Emergency Pack (Consult Factory)

Fusing

GLR GMF

Shielding

S58=KSH-12 Clear Acrylic Prismatic Lens


S72=White Bold Baffle

S79=Semi-Specular Aluminum Parabolic Baffle

1 Due to various constraints, some options may not be combined with others.

2 Can be left blank or more than one option may be available, consult factory.


SHIELDING OPTIONS



S58 Acrylic Lens



S72 Bold Baffle



S79 Parabolic Baffle

NOTES: For complete product data, refer to the Neo-Ray Specification Binder. Specifications and dimensions subject to change without notice. Products may be modified for use in international markets. Please contact your Cooper Lighting Sales Representative for availability and ordering information.